
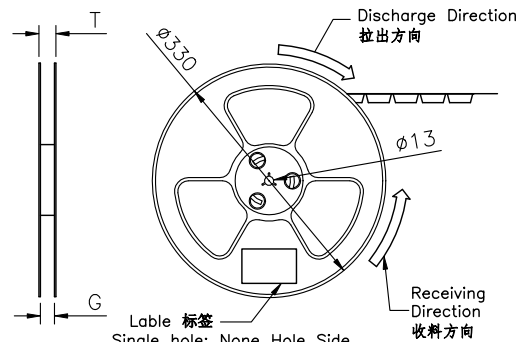


RoHS


本产品符合我司QA-3-04-005
环境管理物质标准规范

包装图


RD-1

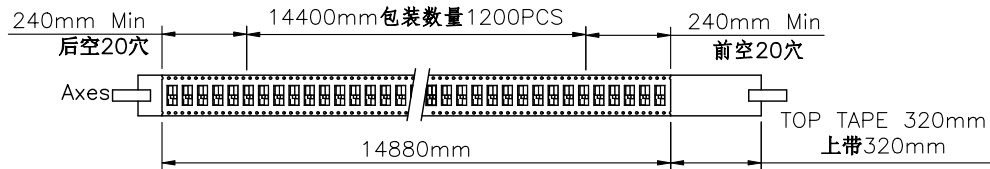

COVER TAPE PEEL STRENGTH:20~120g
剥离力量20~120g
速度 PEEL SPEED:300mm/minute

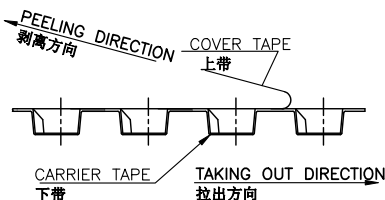


Vacuum packing
真空包装
Drier
干燥剂放1包5g

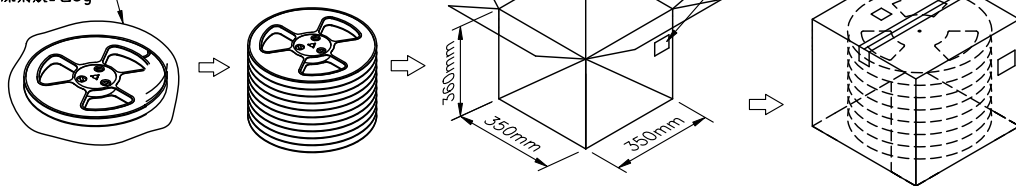


Note:


- Carrier Camber Is Within 1mm In 100mm ;带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.2MM;圆孔十个孔距离累计允许公差为±0.2mm
- Material for PS ;材质为PS材质; Color颜色:Natural透明色
- Bracer保护带: Color颜色:Natural透明色;厚度0.40mm最小
- Thickness=0.35±0.05 ; 材料厚度为0.35±0.05mm
- Cover Tape上带: Adhesive冷封
- Carton material纸箱材质:K=K; Carton Thickness纸箱厚度: 6~7mm

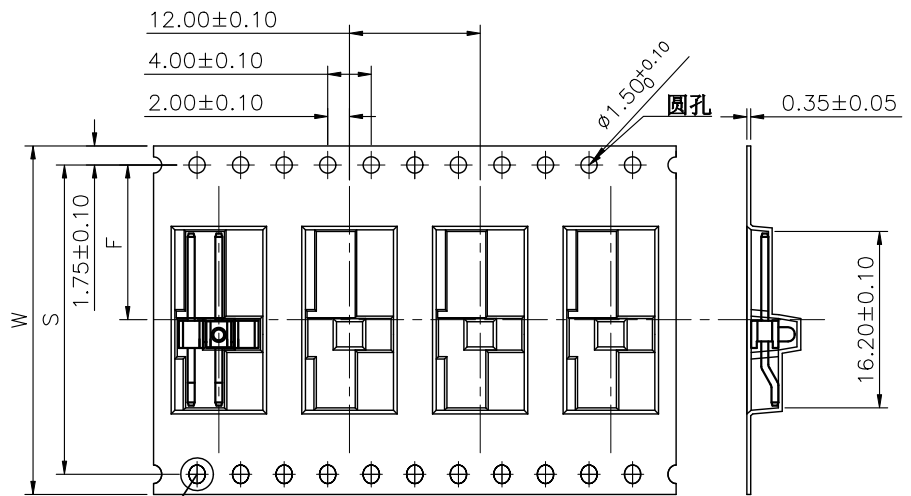

WIDTH载带宽度W=32mm



PULL OUT DIRECTION
引出方向

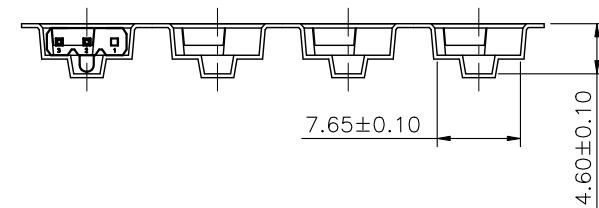

Product Part Number. 产品料号	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
6501WRS-03N01P-9TV01B-04	32.0	28.40	14.20	36.50	32.50	1200	9	10800



东莞市思索连接器有限公司
SWB CONNECTORS CO.,LTD

料号:PK-6501WRS-03N01P-9TV01B-04

名称:
2.54mm Connectors 90° Packing

单位	比例	页次	版本	编号
mm	1:1	1/1	A	A-013

日期	版次	变更编号	变更内容说明	变更人	核准
2021/01/21	A	/	首次发行	/	/

核准	审查	制作	日期
		滕敏	2021/01/21

一般公差
.X ±0.35
.XX ±0.25
.XXX ±0.15
X° ±2°
视角