

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TM/TF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

### Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

### Position Graph:

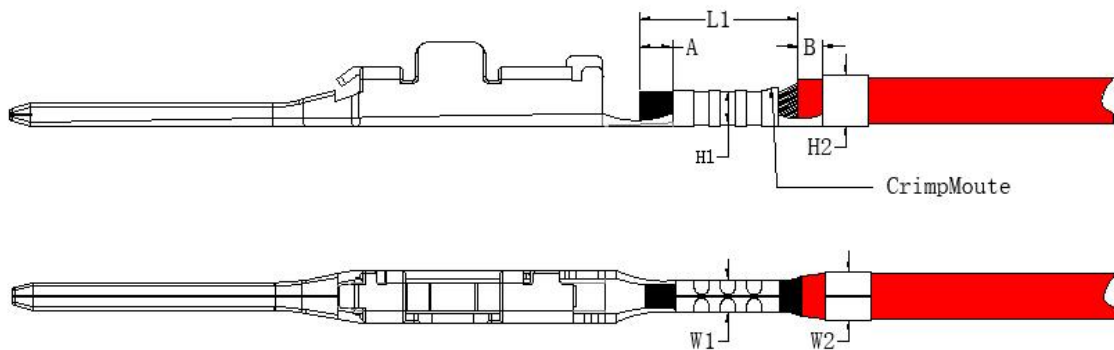

### Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

# Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TM/TF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject: FLRY -A or CHFUS equivalent type electric wire

AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
#20~#18	0.5mm <sup>2</sup> ~0.75mm <sup>2</sup>	1.40mm~1.60mm	0.50mm~1.10mm	0.30mm~0.80mm	3.70mm~4.20mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
FLRY -A 0.5mm <sup>2</sup>	1.60±0.03mm	1.19±0.03mm	1.75±0.05mm	1.95±0.05mm	50.0N
CHFUS 0.75mm <sup>2</sup>	1.77±0.03mm	1.27±0.03mm			85.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature:       7X       ENG

Dongguan SESO Technology Co.,Ltd

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TM/TF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2021/12/07	A	Initial Issued	/	Jack Zhang
2023/10/11	A1	Change wire specifications and wire skin crimp dimensions	FX	Jack Zhang

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201THM/THF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

### Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

### Position Graph:

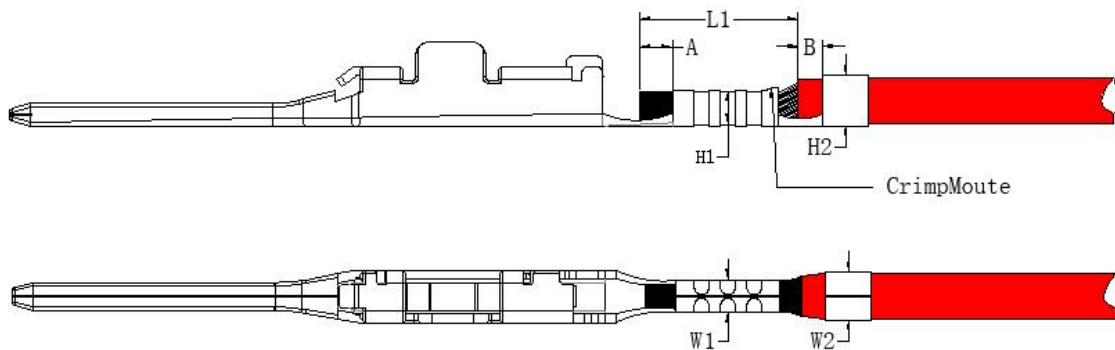

### Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201THM/THF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject: AVSS or equivalent type electric wire					
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
0.85mm <sup>2</sup>	0.85mm <sup>2</sup>	1.80mm(max)	0.50mm~1.10mm	0.30mm~0.80mm	3.70mm~4.20mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
0.85mm <sup>2</sup>	1.80±0.03mm	1.35±0.03mm	1.95±0.05mm	2.40±0.05mm	100.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature: FX ENG

Dongguan SESO Technology Co.,Ltd

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201THM/THF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2021/12/07	A	Initial Issued	/	Jack Zhang
2023/10/11	A1	Cancel the 0.75mm <sup>2</sup> crimp specification	FX	Jack Zhang

# Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TLM/TLF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

## Description:


Height and width of conductor crimp core should be set as required.

(conductor crimp height and width of conductor barrel)

According to the external diameter and the type of electric wire, the width of crimped sheath shall be adjusted, wire won't be easily taken off from contact nor too much crimped.

(Crimped width of insulation barrel)

## Position Graph:

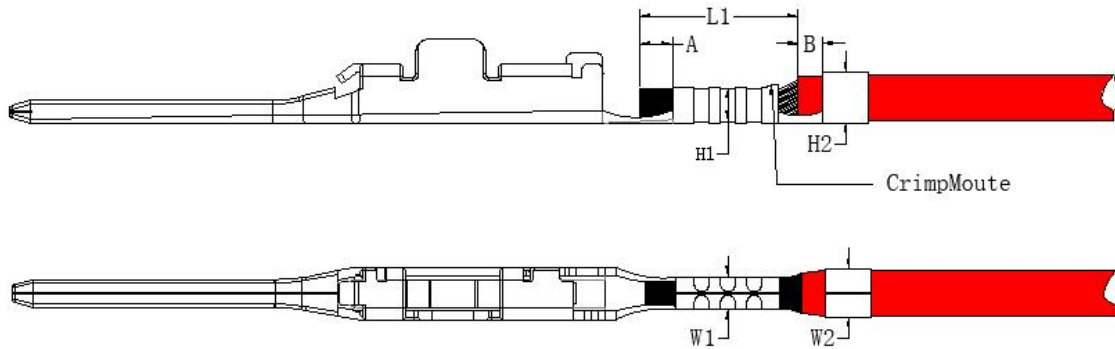

## Note:

1. Conductor crimp width. W1
2. Conductor crimp height. H1
3. Insulator crimp width. W2
4. Insulator crimp height. H2
5. Conductor wire shall be dimension long (mm) out A.
6. Naked part of sheathed wire must be located in the vicinity of center B.
7. The Crimp mouth must be equipped like bell.

## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TLM/TLF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Requirement:

Subject: FLRY-A or equivalent type electric wire					
AWG#	Conductor (mm <sup>2</sup> )	Insulation Diameter	Insulator skins length (Dim .B) mm	Copper wire leakage size (Dim .A) mm	Dim. L1 (mm) out
24#~22#	0.22mm <sup>2</sup> ~0.35mm <sup>2</sup>	1.10mm~1.30mm	0.50mm~1.10mm	0.30mm~0.80mm	3.70mm~4.20mm
Wire Gauge (AWG#)	Conductor Crimp Area		Insulator Crimp Area		Terminal Tensile Strength
	Width (W1)	Height(H1)	Width (W2)	Height(H2)	
0.22mm <sup>2</sup>	1.57±0.03mm	0.93±0.03mm	1.75±0.05mm	1.65±0.05mm	40.0N
0.35mm <sup>2</sup>		0.97±0.03mm		1.75±0.05mm	50.0N

Remarks

1. Unlike equipment and crimp reel molds skill facility or not shall be difference to result in dissimilar.
2. This crimping specification is not limited to material changes.

Signature:       7X      ENG

Dongguan SESO Technology Co.,Ltd



## Crimp specification

Type Document	Crimp Specification	Revised /Edition	A1
Date Issued:	2021/12/07	Data Revised:	2023/10/11
Subject: 2201TLM/TLF 2.20mm Pitch Terminal crimp specification			Issued By: Engineering Dept.

Date	REV	DESCRIPTION	MODIFY	APPROVAL
2021/12/07	A	Initial Issued	/	Jack Zhang
2023/10/11	A1	Add A-size data	FX	Jack Zhang