RoHS | This products can apply to the SESO Doc NO. QA-3-04-005 of Environmental&Material Management Rules

Preliminary drawing
This is subject to change without notice

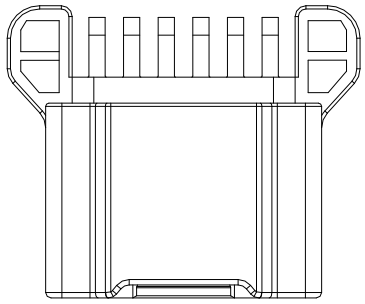

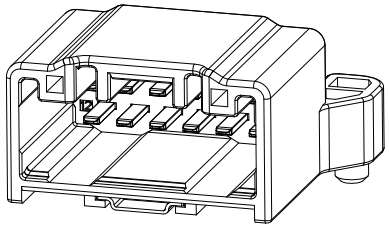

东莞市思索技术股份有限公司 www.SESO.cn APPROVED 研发中心 Dongguan SESO Technology Co.,Ltd.

■Specifications:
- Voltage Rating:48V AC/DC
- Current Rating:1.5A AC/DC
- Withstanding Voltage:500V AC/Minute
- Temperature Range:-40°C~+105°C
- Insulation Resistance:100MΩ Min./500V DC/Minute
- Contact Resistance:≤25mΩ

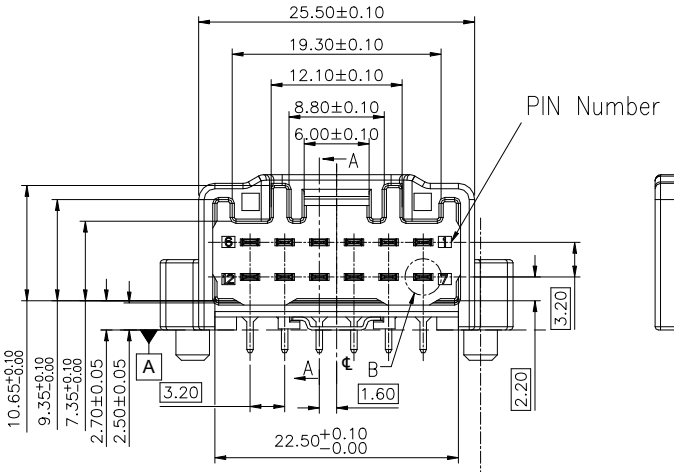

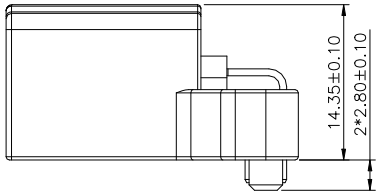

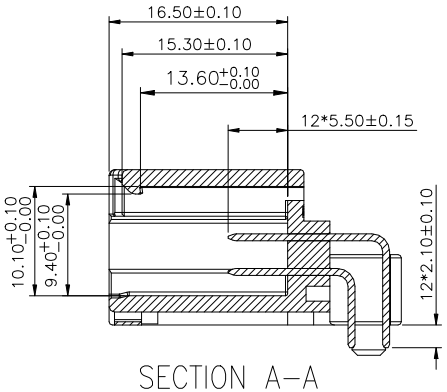

SECTION A-A

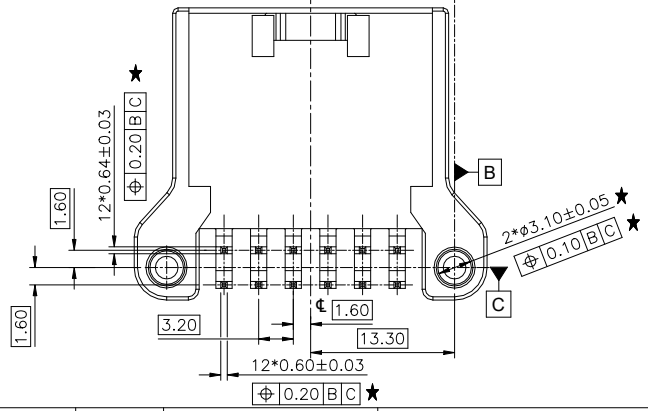



局部视图 B
比例 4:1

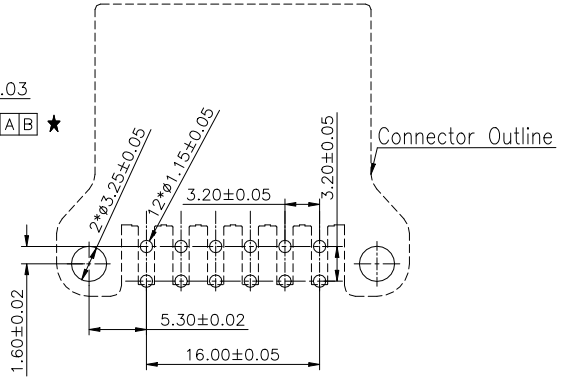

APPLICABLE P.C.B LAYOUT(REF.)
P.C.B THICKNESS t=1.6mm

3202 W R - 2*06 X - 4T SW1 X R
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.:3202
② Category:W-Wafer
③ Connector Type:R-DIP 90°
④ Row No.-Pin No.:2*XX-2*06P
⑤ Special No.:
⑥ Plastic Material:4T-PA4T 94V-0
⑦ Planting Code:SW1-Matte Tin
Underplate:Ni 40~120u"(1~3um) overall
Top Plating:Sn 80~200u"(2~5um) overall
⑧ Color:B-Black
⑨ Packing:R-Reel

DATE	REV	ECN NO.	DESCRIPTION	MODIFY	APPROVAL

GENERAL TOLERANCE
.X ±0.35
.XX ±0.25
.XXX±0.15
X.° ±2°
PROJECT

SMS 东莞市思索技术股份有限公司 Dongguan SESO Technology Co.,Ltd.

APPROVAL	CHECK	DRAWN	DATE
Jack Zhang	Larry Yang	Zeng	2023/06/06

PART NO. 3202WRS-2*06-4TSW1BR
TITLE: 3202mm Pitch WAFER ASSY Right Angle 90°

UNIT	SCALE	SHEET	REV	NUMBER
mm	1:1	1/1	X0	CD